
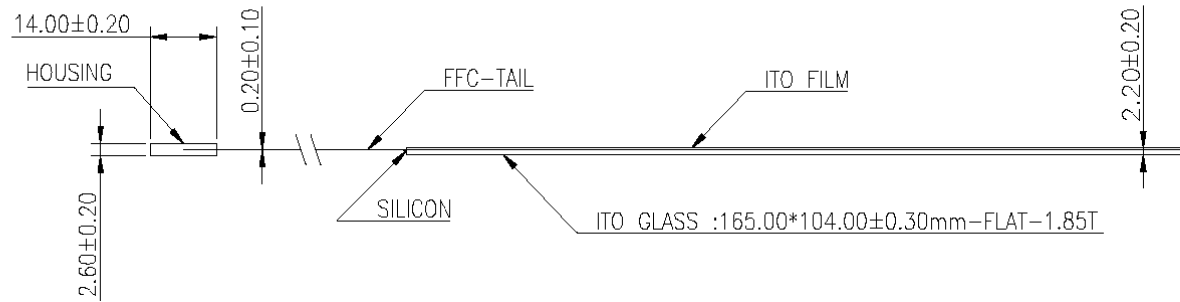
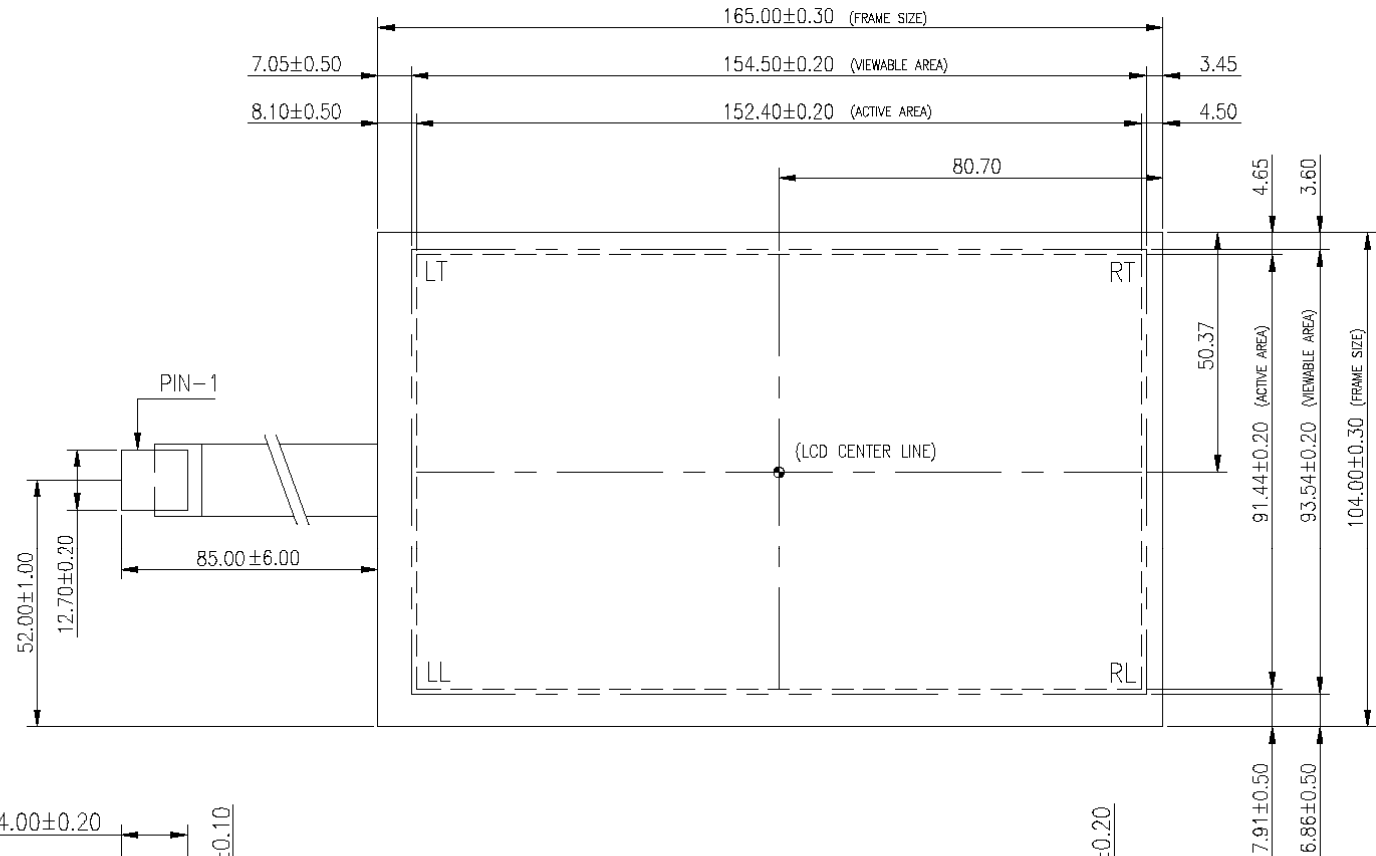



| CONNECTOR PINOUT | |
|------------------|-------------|
| PIN NO. | DESIGNATION |
| 1 | RT |
| 2 | RL |
| 3 | SG |
| 4 | LT |
| 5 | LL |



| | | | | | | |
|--|----------------------------|----------------------|---------------|-----------------------------|-----------------|-------------------------|
| 瞄準科技有限公司 AIM TOUCH TECHNOLOGY CO.,LTD. | DATE : 2010/02/11 | Part Number | ITO Film Type | Glass Type | Glass Thickness | Finished Part Thickness |
| | MODEL : AIM-5R-0700-A18 | AIM-5R-0700-A18-G1N | ANTI GLARE | high temperature strengthen | 1.1mm | 1.4mm±0.2 |
|  WWW.AIMTOUCH.COM.TW | | AIM-5R-0700-A18-G16N | ANTI GLARE | chemical strengthen | 1.6mm | 1.9mm±0.2 |
| | | AIM-5R-0700-A18-G2N | ANTI GLARE | high temperature strengthen | 1.85mm | 2.2mm±0.2 |

NOTE : All indications are the millimeters.